

# Snelling's Thermo-Vac — INC. —

SINCE 1979

8/1/02

## CEILINGS MAGNIFIQUE & INTERIORS

P.O. BOX 210    BLANCHARD, LA. 71009    OFFICE (318) 929-7398    FAX (318) 929-3923

**T**he elegance and beauty of yesterday made of durable, lightweight, high impact polymer plastic. They are easy to install, paintable and washable. Several patterns to choose from plus custom design and molding services are available. Fire-rated materials and colors other than white are available at special prices.



ALEXANDER

**INSTALLING THE CEILING TILES:** Our ceiling tiles may be installed by nailing, stapling, gluing or double stick tapes. The method you use will be determined by the underlying material you secure the tile to.

**PAINTING THE TILES:** Tiles can be painted before or after installation. Be sure tiles are completely clean and dry. If painting after installation, install Decorative Strips prior to painting. Use an oil based paint, such as Alkyd enamel. Prime coat is not required. Spray paint works well. *Do not use water based paint.* Do not use solvent type thinner or cleaners on tile.

**CUTTING TILES FOR DESIRED SIZE:** The ceiling tiles and filler panels may be cut to fit areas around the edge of the room.

To cut the panel lay a straight edge of at least 24" long on the cutting line and on the flat side. Score the panel surface with a sharp instrument. Bend the trimmed edge down at a right angle and it will snap off, and/or use snips or scissors.

**SUSPENDED CEILINGS:** The ceiling tiles are made to fit into a 2' x 2' suspended grid system. Our tiles are cut 23-3/4" x 23-3/4". Where suspended grid systems are 2' x 4' size, add a 2' "Tee-Bar" to change the grid system to a 2' x 2' size.

**PREPARATION FOR PLASTER CEILINGS OR SHEETROCK:** Plaster or sheetrock ceilings must be clean, dry and free of oil and grease. For new construction, the sheet rock can be installed with the back side out to eliminate the edge indentation made from the seam tape and the panels are then adhered directly onto the sheet rock. If the sheetrock has excessive damage or gaps, taping and bedding may be necessary. It is recommended that 5/8" Fire Rock be used on the ceilings for commercial installation.

When comparing ceilings, please consider the depth of pattern, clarity of design, complexity of pattern, durability of material, weight and underlying construction requirements, difficulty of installation and total ceiling system cost. If you do, we are confident that you will choose our complete line of ceiling products.


We are anxious to assist you in the installation of our product and can be reached for advice during our office hours.



**We offer a complete ceiling system.  
One that is beautiful, durable and economical.**



**EVANGELINE**




**EXECUTIVE  
(COFFER)**



**ALEXANDER**

**RESERVED**

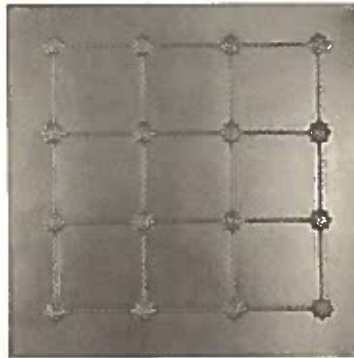


**ROSETTE**



**TRADITIONAL**



**FLORENTINE**

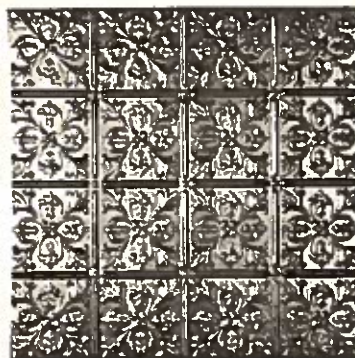

**FLEUR-DE-LIS**



**DIXIE**

**TILE - SIZES: 23<sup>3</sup>/<sub>4</sub>" X 23<sup>3</sup>/<sub>4</sub>"**



**EGG AND DART MOLDING**  
**4<sup>1</sup>/<sub>2</sub>" X 48"**



**DECORATIVE STRIPS**  
**1" X 24" and 1" X 23<sup>3</sup>/<sub>4</sub>"**






**ROYAL**



**ELEGANCE**




**ORLEANS**




**EMPIRE**



**JACKSON**

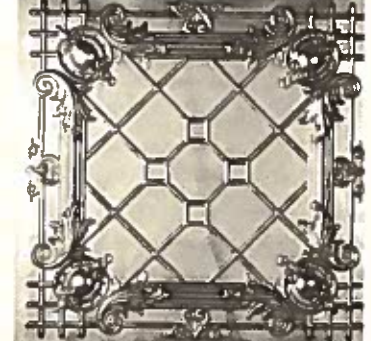


**BENTLEY**



**COVINGTON  
(COFFER)**


**OUTSIDE CORNER**

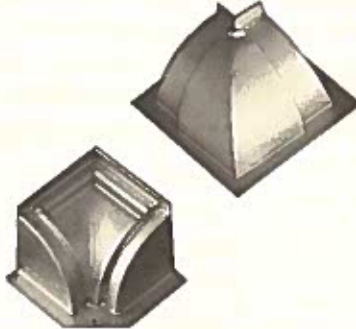

**INSIDE CORNER**

**EGG DART/CAROLINE**

**OUTSIDE CORNER**



**INSIDE CORNER**

**ARCH**



**CAROLINE MOLDING  
5½" x 48"**



**ARCH MOLDING  
5½" x 48"**

P O Box 210  
Blanchard, LA 71009


130 Front Street  
Blanchard, LA 71009

**Snelling's**  
**Thermo-Vac**  
INC.

318.929.7398  
Fax 318.929.3923

[www.ceilingismagnifique.com](http://www.ceilingismagnifique.com)  
[info@ceilingismagnifique.com](mailto:info@ceilingismagnifique.com)

CEILINGS MAGNIFIQUE & INTERIORS

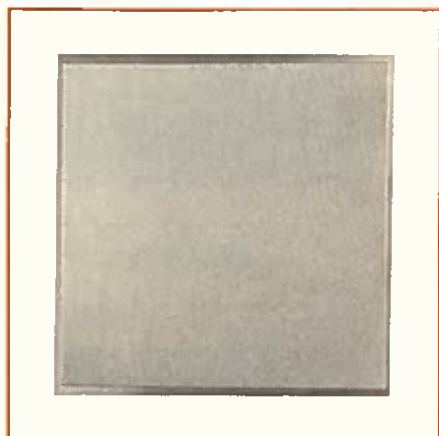

DIAMOND FILLER PANEL



CONTINENTAL FILLER PANEL



CENTURY FILLER PANEL

Snelling's ceiling and wall panels are hand made and individually inspected. These panels are the most beautiful available today in any medium. They are of the highest quality and will make any interior more beautiful than you can imagine.

These very versatile tiles have been used in homes, restaurants, banks, bars, stores, and boutiques. They are used for commercial and residential construction, both new and old. The new polymer material we use, provides a consistency of texture, pattern, and color that you can depend on year after year.

A major advantage of Snelling's panels is easy cleaning with mild household detergent and plain water rinse. You may nail or staple them and they will not split or crack, as they might if they were formed using reconstituted materials. The semi-gloss texture creates an artificial pore system thus providing an excellent adherence of paint and adhesives.

Our panels are manufactured using materials that can withstand considerable handling and abuse without damage. This material will not deteriorate, rust or corrode. It is light weight and easy to install. You can nail, staple or glue our products in place. You can use a suspended grid system that, when decorated with our exclusive joint strip, becomes invisible and indistinguishable from the custom built ceiling. You can paint the panels any color or leave them in their natural beautiful white semi-gloss finish. They can be installed by professionals or by the home owner. They will last a lifetime and be a source of constant comment from all who see them.

The tin ceilings of yesterday was our American attempt to duplicate the beautiful plaster ceilings of Europe. Today, we offer this most beautiful of all ceilings in a modern material, high impact polymer plastic, in which the texture closely resembles the appearance of the plaster ceiling. Molded polymer is the ceiling material of the Twentieth Century, (and Twenty-first).

*Style, Elegance, Versatility. . .*

